

PrepAwayExam

PrepAwayExam

> Contact Us

Login / Register

Search...



HOME

ALL VENDORS

★ GUARANTEE

? FAQ

TESTIMONIALS

CART (0)

Pass Your Next Certification Exam Fast!

Everything you need to prepare, learn & pass your certification exam easily.

365 days free updates. First attempt guaranteed success.

Try **Online Engine** before you buy

Instant Download



After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

365 Days Free Updates



Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



Money Back Guarantee

Full refund if you fail the corresponding exam in 60 days after purchasing. And Free get any another product.



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

<http://www.prepawayexam.com/>

High-efficient Exam Materials are the best high pass-rate Exam Dumps

Exam : **1z0-850**

Title : Java Standard Edition 5 and 6,
Certified Associate Exam

Vendor : Oracle

Version : DEMO


NO.1 A Java programmer wants to develop a browser-based multitier application for a large bank. Which Java edition (or editions) should be used to develop this system?

- A. only J2ME
- B. J2SE and J2EE
- C. J2SE and J2ME
- D. only J2SE
- E. only J2EE
- F. J2EE and J2ME

Answer: B

NO.2 Click the Exhibit button.

Which correctly implements the relationships shown in the diagram?

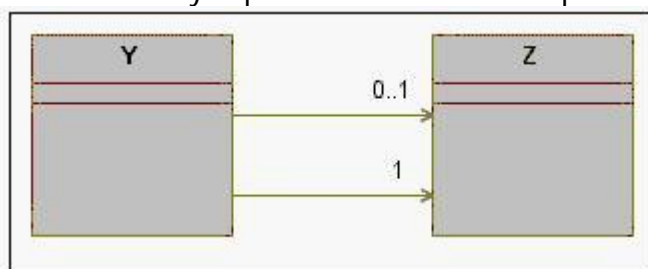

A. `public class Y {
private Z[] z1and2;
public Y(Z[] z1and2) {
if (z1and2 == null || z1and2.length != 2) {
System.exit(1); // ERROR!
}
this.z1and2 = z1and2;
}
}`

B. `public class Z {
private Y[] y1and2;
public Z(Y[] y1and2) {
if (y1and2 == null || y1and2.length != 2) {
System.exit(1); // ERROR!
}
this.y1and2 = y1and2;
}
}`

C. `public class Z {
private Y y1;
private Y y2;
public Z(Y y1) {
if (y1 == null) System.exit(1); // ERROR!
this.y1 = y1;
}
public Z(Y y1, Y y2) {
this(y1);
this.y2 = y2;
}`

```
}  
}  
D. public class Y {  
  private Z z1;  
  private Z z2;  
  public Y(Z z1) {  
    if (z1 == null) System.exit(1); // ERROR!  
    this.z1 = z1;  
  }  
  public Y(Z z1, Z z2) {  
    this(z1);  
    this.z2 = z2;  
  }  
}
```

Answer: D

NO.3 Given:

```
6 . int time = 12;  
7 . if ( time < 12 ) {  
8 . System.out.println("Good morning");  
9 . }  
10. // insert code here  
11. System.out.println("Good afternoon");  
12. }  
13. else if ( time >= 18 ) {  
14. System.out.println("Good evening");  
15. }
```

Which three, inserted independently at line 10, produce the output Good afternoon?
(Choose three.)

- A. else if (time > 12 || time <= 18) {
- B. else if (time > 12 && time >= 18) {
- C. if (time >= 12 && time < 18) {
- D. else if (time >= 12 || time < 18) {
- E. else if (time < 12 || time > 18) {

Answer: A,C,D

NO.4 Which is true about RMI?

- A. RMI is used to create thin web clients.
- B. RMI is used to develop applications for wireless mobile devices.
- C. RMI is the Java API used for executing queries on a database.
- D. RMI allows objects to be sent from one computer to another.
- E. RMI is the transport protocol used by web servers and browsers.

Answer: D

NO.5 What is the correct name for J2EE?

- A. Java 2 Package, Enterprise Edition
- B. Java 2 Platform, Enterprise Environment

- C. Java 2 Package, Enterprise Environment
- D. Java 2 Platform, Enterprise Edition

Answer: D

NO.6 Which three are provided by the EJB tier in a multitier J2EE application? (Choose three.)

- A. dynamic content generation
- B. XML parsing
- C. transaction management
- D. security
- E. concurrency control

Answer: C,D,E

NO.7 Which is NOT a correct statement about entity beans?

- A. They are persisted using BMP and CMP.
- B. They are used to share data among clients.
- C. They are used to store persistent data.
- D. They are used to implement business processes.
- E. They are used to represent data stored in an RDBMS.

Answer: D

NO.8 Which two are true about stateless session beans? (Choose two.)

- A. They are used to represent data stored in an RDBMS.
- B. They implement the JMS API.
- C. They are used to implement business logic.
- D. They CANNOT hold client state.

Answer: C,D

NO.9 Which two are true? (Choose two.)

- A. Classes in the java.awt package are used to paint objects on canvases.
- B. Classes in the java.awt package inherit many behaviors from classes in the java.swing package.
- C. Classes in the javax.swing package provide support for complex GUI components, such as tables and trees.
- D. Classes in the java.awt package are designed to provide lightweight components that work the same across different platforms.

Answer: A,C

NO.10 Which two technologies are used for processing HTTP requests and mapping those requests to business objects? (Choose two.)

- A. web services
- B. JMS
- C. EJB
- D. servlets

Answer: A,D